

**DINO® TRAILERS**

# **DINO** 130T

- Working height 12.9 m
- Telescopic boom – large outreach
- Robust, lightweight, cost-effective



**Access Sales & Spares**

PH: (03) 9312 3835 FX: (03) 9312 3831  
[accesssalesandspares.com](http://accesssalesandspares.com)

## DINO 130T

### Standard features in DINO 130T:


- Petrol power pack (picture 1)
- Proportional controls
- Best in class 12.9 m working height, 9.1 m outreach
- Continuous rotation of the boom; easy and functional
- Spacious, easy-entry basket; capacity 215 kg
- Large outrigger pads 300 x 300 mm
- Simple, easy to use and maintain

### Options available for DINO 130T:

- Driving system; easy to move at work site (picture 2)
- Cable steering for driving (picture 3)
- DINO SafeGuard secondary guarding (pictures 4 and 5)
- Basket rotation 90°
- Outrigger support indicator (picture 6)
- LED working lights
- Electro motor 240VAC



### Technical data

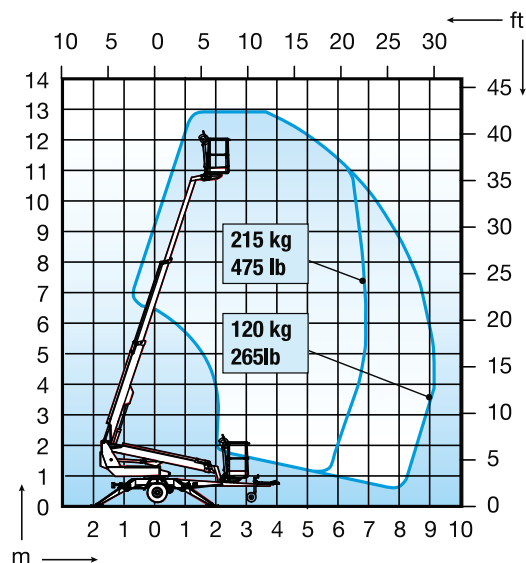

Max. working height	12.90 m
Max. platform height	10.90 m
Max. outreach	9.10 m
Support width	3.80 / 4.20 m
Lifting capacity	215 kg
Basket size	0.70 x 1.30 m
Boom rotation	cont.
Boom control	proport.
Transport length	5.96 m
Transport width	1.78 m
Transport height	2.16 m
Weight	1635 kg
Petrol power pack	std
Electro motor	opt.
Basket rotation 90°	opt.
Driving system	opt.
AC socket in the basket	opt.
Gradeability	25 %

