

**Dingli**   
**Australia**

[www.dingliaustralia.com.au](http://www.dingliaustralia.com.au)




**E-Tech**

**S06-E**

## ELECTRIC SCISSOR LIFTS

# E-Tech

## S06-E

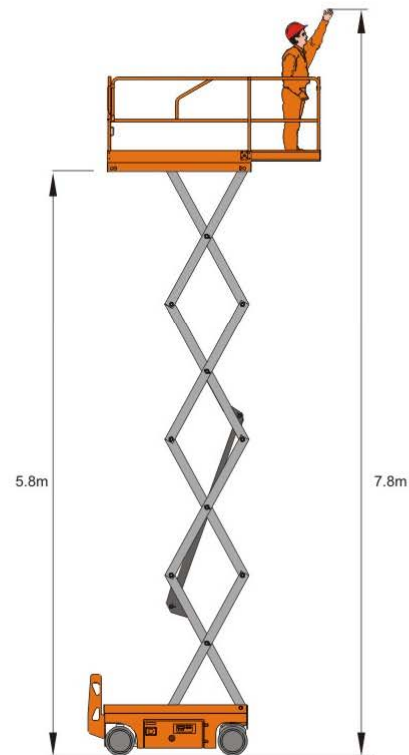

<b>S.W.L</b>	230kg/507lb
<b>S.W.L on extension</b>	113kg/249lb
<b>Maximum workers number</b>	2 Indoor/1 Outdoor



<b>Working height</b>	7.8m/25ft7in
<b>Platform floor height</b>	5.8m/19ft



<b>Overall length</b>	1.86m/6ft1in
<b>Overall width</b>	0.76m/2ft6in
<b>Overall height(Rails up)</b>	2.16m/7ft1in
<b>Overall height(Rails down)</b>	1.84m/6ft
<b>Platform size</b>	1.67mx0.74m/5ft7inx2ft5in
<b>Platform extension size</b>	0.9m/2ft11in
<b>Ground clearance(Stowed)</b>	0.09m/4in
<b>Ground clearance(Raised)</b>	0.019m/0.7in
<b>Wheelbase</b>	1.38m/4ft6in
<b>Turning radius(Inside)</b>	0m
<b>Turning radius(Outside)</b>	1.64m/5ft4in



<b>Drive motors</b>	24V/0.5kw
<b>Lifting motor</b>	24V/3kw



<b>Travel speed(Stowed)</b>	5km/h 2miles/h
<b>Travel speed(Raised)</b>	0.8km/h 0.5miles/h
<b>Up/Down speed</b>	31/37sec
<b>Wind Rated</b>	0-12.5m/s



<b>Batteries</b>	4x6V/185Ah
<b>Integrated charger</b>	24V/30A



<b>Gradeability</b>	25%
<b>Maximum working slope</b>	1.5-3°



<b>Tyres</b>	Φ 305x100mm
--------------	-------------



<b>Weight</b>	1400kg/3086lb
---------------	---------------

### Standard Equipment

- Proportional Controls
- Automatic Pothole Protection
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-marking Tyres
- 2WD
- Automatic Brakes
- Emergency Lowering System
- Emergency Stop Buttons
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Overload Sensor With Alarm
- Horn
- Hour Meter
- Safety Brackets
- Forklift Pockets
- Folding Guardrails
- Extended Platform
- Charger Protection
- AC Power To The Platform
- Flashing Beacon

### Options

- Platform Work Lights
- Airline To The Platform

**Please Note:-**  
All information contained in this publication was correct at time of printing but may be subject to change without notice.

