

www.dingliaustralia.com.au




# Summit S0608EH

### **ELECTRIC SCISSOR LIFTS**

## Summit S0608EH





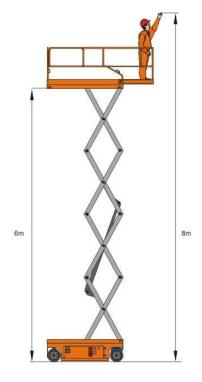



S.W.L	380kg/838lb
S.W.L on extension	113kg/249lb
Maximum workers number	2



Working height	8.0m/26ft3in
Platform floor height	6.0m/19ft8in



Overall length	2.48m/8ft1in
Overall width	0.81m/2ft7in
Overall height(Rails up)	2.21m/7ft3in
Overall height(Rails down)	1.75m/5ft8in
Platform size 2.27mx0.8	31m/7ft5inx2ft7in
Platform extension size	0.9m/2ft11in
Ground clearance(Stowed)	0.1m/4in
Ground clearance(Raised)	0.019m/0.7in
Wheelbase	1.87m/6ft1in
Turning radius(Inside)	0m
Turning radius(Outside)	2.19m/7ft2in



Lifting motor	24V/3kw
Enting motor	Z-T V / JIN VV



Travel speed(Stowed)	3.5km/h 2miles/h	
Travel speed(Raised)	0.8km/h 0.5miles/h	
Up/Down speed	22/34 sec	
Wind Rated	12.5m/s	





Gradeability	25%	
Maximum working slope	2-3°	



Tyres Ф381x127mm



Weight 1950kg/4299lb

### Standard Equipment

- Proportional Controls
- Automatic Pothole Protection
- Automatic Potriole Protection
  Self-lock Gate On Platform
  Drivable At Full Height
  Non-marking Tyres
  2WD

- Automatic Brakes
- Emergency Lowering System Emergency Stop Buttons
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Overload Sensor With Alarm

- Horn
- Hour Meter

- Safety Brackets Forklift Pockets Folding Guardrails
- Extended Platform - Charger Protection
- AC Power To The Platform
- Flashing Beacon

#### Options

- Platform Work Lights
- Airline To The Platform

