

**Dingli**  
**Australia**

[www.dingliaustralia.com.au](http://www.dingliaustralia.com.au)





**Summit**  
**S0808EH**

## ELECTRIC SCISSOR LIFTS

# Summit

## S0808EH

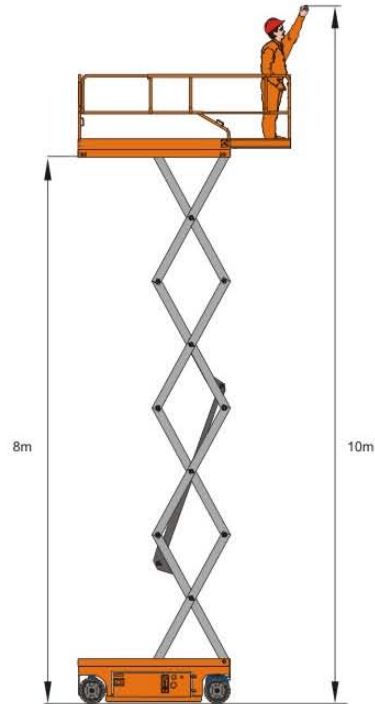

<b>S.W.L</b>	230kg/507lb
<b>S.W.L on extension</b>	113kg/249lb
<b>Maximum workers number</b>	2



<b>Working height</b>	10.0m/32ft9in
<b>Platform floor height</b>	8.0m/26ft3in



<b>Overall length</b>	2.48m/8ft1in
<b>Overall width</b>	0.81m/2ft7in
<b>Overall height(Rails up)</b>	2.34m/7ft8in
<b>Overall height(Rails down)</b>	1.88m/6ft2in
<b>Platform size</b>	2.27m x 0.81m / 7ft5in x 2ft7in
<b>Platform extension size</b>	0.9m / 2ft11in
<b>Ground clearance(Stowed)</b>	0.1m / 4in
<b>Ground clearance(Raised)</b>	0.019m / 0.7in
<b>Wheelbase</b>	1.87m / 6ft1in
<b>Turning radius(Inside)</b>	0m
<b>Turning radius(Outside)</b>	2.19m / 7ft2in



<b>Lifting motor</b>	24V/3kw
----------------------	---------



<b>Travel speed(Stowed)</b>	3.5km/h 2miles/h
<b>Travel speed(Raised)</b>	0.8km/h 0.5miles/h
<b>Up/Down speed</b>	22/40 sec
<b>Wind Rated</b>	12.5m/s



<b>Batteries</b>	4x6V/185Ah
<b>Integrated charger</b>	24V/25A



<b>Gradeability</b>	25%
<b>Maximum working slope</b>	2-3°



<b>Tyres</b>	Φ381x127mm
--------------	------------



<b>Weight</b>	2100kg/4630lb
---------------	---------------

### Standard Equipment

- Proportional Controls
- Automatic Pothole Protection
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-marking Tyres
- 2WD
- Automatic Brakes
- Emergency Lowering System
- Emergency Stop Buttons
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Overload Sensor With Alarm

- Horn
- Hour Meter
- Safety Brackets
- Forklift Pockets
- Folding Guardrails
- Extended Platform
- Charger Protection
- AC Power To The Platform
- Flashing Beacon

### Options

- Platform Work Lights
- Airline To The Platform

